



## Exchange of ALP 51 by BLP 59-S

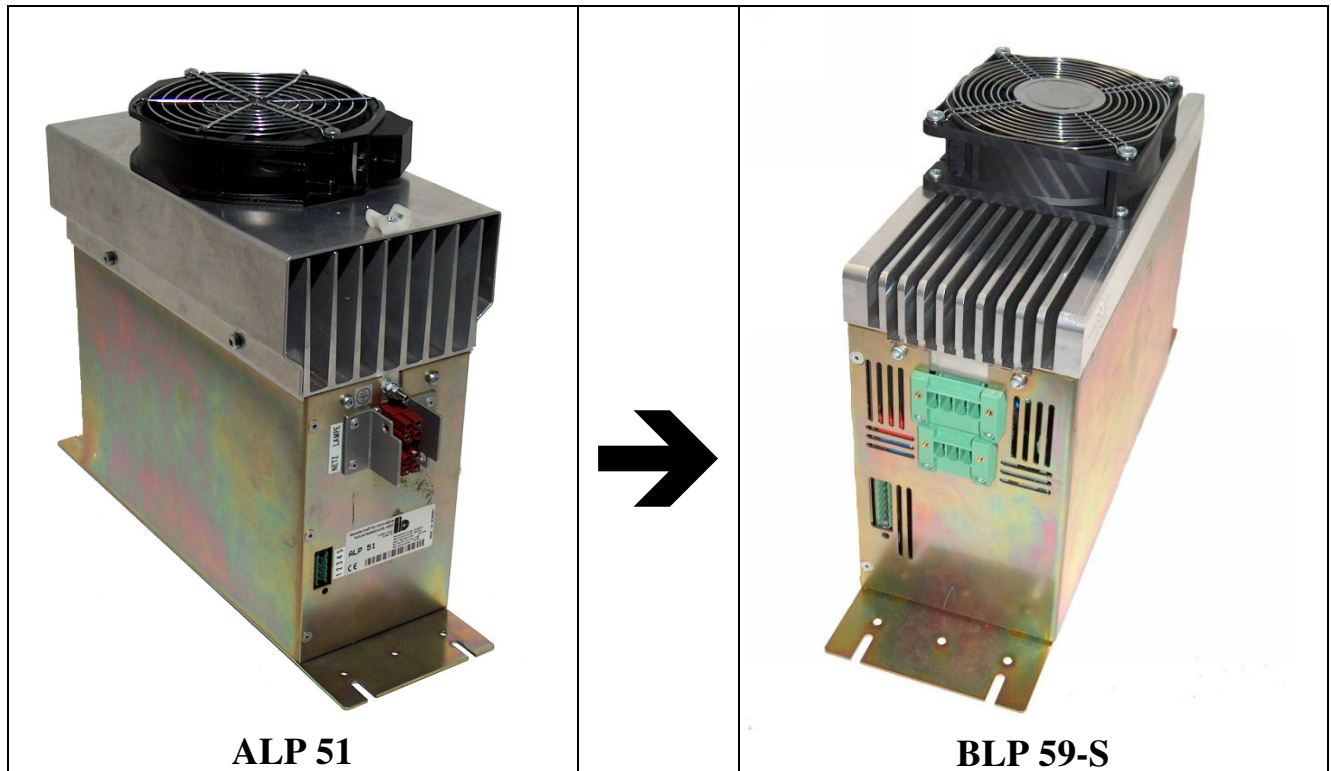

The exchange of a ALP 51 to a BLP 59-S is easy and simple. Only the following issues have to be taken into account:

1. The foot print of the BLP 59-S is identical to ALP 51, the height is a little lower. Due to the little outside mounted second fan allow a minimum of 35mm distance to any air flow blocking parts.
2. Both fans of BLP 59-S are supplied internal. As a result, the supply cables of the ALP 51 fan have to be disabled, removed or isolated. They are not longer used.
3. The control is identical, inclusive connector. There is only one exception: due to the 6 kW output power of the BLP 59-S (only 5000W with ALP 51) the output power in any case will be 20% higher! (see next paragraph)
4. In case of exchange the max. output power of the BLP 59-S has to be limited to 5000W while ordering (please state in an order). Otherwise the 20% higher output power will cause thermal problems with your lamp and lamp head. You will loose any warranty of your lamp head!
5. For a simple connection of mains and lamp with the same old cable (ALP 51 cable) we can provide an adapter between the ALP 51 and the BLP 59-S connectors.  
Anyway, its easy to reconnect the BLP 59-S directly be an electrician, as those BLP connectors have screw terminals.

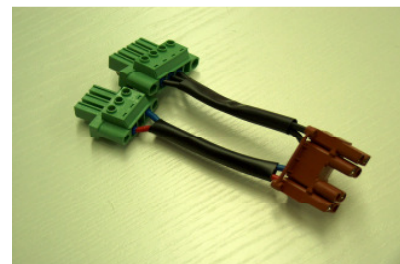

Anschlussadapter ALP51-BLP59-S